


MULTI-SPEED

Variable Speed V-belt



Gates Multi-Speed belt provides top performance on variable speed drives. It adjusts itself to the pulley groove without difficulty, providing a wide range of speeds and speed ratios.

In addition to the standard Multi-Speed belt line, special sizes [top width, thickness and angle] are available on request.

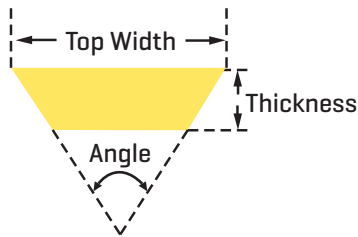

Note :

When crossing over an existing variable speed belt select a belt with dimensions that fall within the following tolerances:


- ± 2mm - Top Width
- ± 15mm - Outside Circumference
- ± 2 degrees - Angle

Construction

- > Engineered notch contour increases flexibility. The notches ensure maximum heat dispersion, considerably decreasing running temperatures.
- > Flex-Bonded tensile cords
- > Strong transverse rigidity offers high resistance to distortion of the belt in the pulley. This results in even load distribution and wear reduction.
- > Uniform composition and thickness of the undercord ensure smooth and silent running.
- > Combination of these construction features gives maximum speed adjustment.

Advantages

- > Maximum range of speed changes.
- > High load-carrying capacity.
- > Smooth machine operation.
- > Exceptionally long belt life.

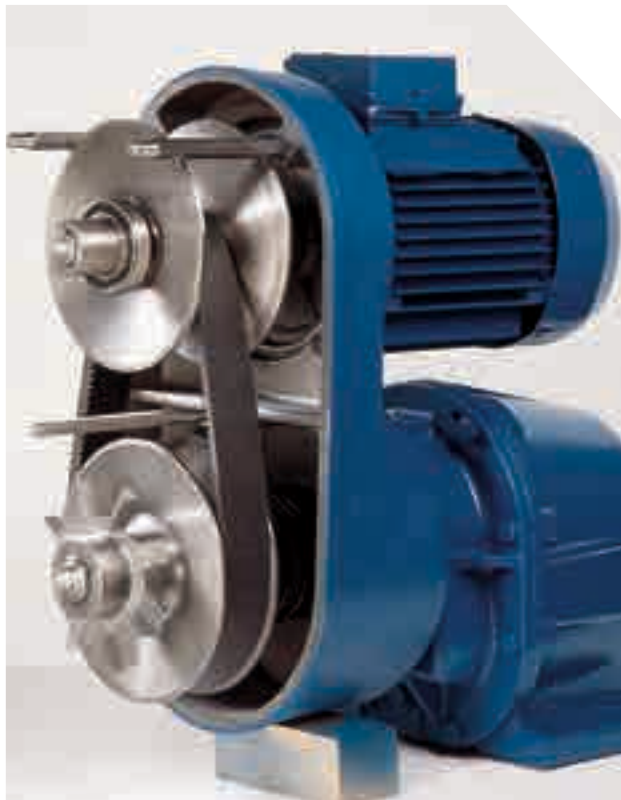

MULTI-SPEED ORDERING CODE IS COMPOSED AS FOLLOWS:

23x8x600	
23	- Top width [mm]
8	- Thickness [mm]
600	- Inside length [mm]
630W16	
630	- Pitch length [mm]
W16	- Standardised Cross-section
1422V420	
14	- Top width - 1/16ths of an inch [14/16"]
22	- Angle [°]
V	- Multi-Speed belt
420	- Pitch length [1/10 inch]

MULTI-SPEED

	Special Gates Sizes					Sizes ISO R 1604						
	Inside Length [mm]					Pitch Length [mm]						
Reference	13	23	28	37	47	W16	W20	W25	W31.5	W40	W50	W63
Top Width [mm]	13	23	28	37	47	17	21	26	33	42	52	65
Thickness [mm]	6	8	9	10	13	6	7	8	10	13	16	20
Angle	26°	26°	26°	28°	28°	24°	26°	26°	26°	28°	28°	30°
	600	525	650	800	1000	630	630	710	900	1120	1400	1800
	700	600	700	850	1060	710	710	800	1000	1250	1600	2000
	800	650	750	900	1120	800	800	900	1120	1400	1800	2240
	900	700	800	950	1180	900	900	1000	1250	1600	2000	2500
		750	850	1000	1250	1000	1000	1120	1400	1700	2240	2800
		800	900	1060	1320		1120	1250	1600	1800	2500	3150
		850	950	1120	1400		1250	1400	1800	2000	2800	
		900	1000	1180	1500			1600	2000	2240	3150	
		950	1060	1250	1600					2500		
		1000	1120	1320	1700							
		1060	1180	1400	1800							
		1120	1250	1500	2000							
		1180	1320	1600	2240							
		1250	1400	1700								
		1320	1500	1800								
		1400	1600	2000								
		1500		2240								
Add this dimension [mm] to shown value to obtain approx. Outside Length	37.70	50.27	56.55	62.83	81.68	18.85	21.99	25.13	31.42	40.84	50.27	62.83

Belt Ref. [RMA]	Outside Length [mm]	Top Width [mm]	Angle (°)	Weight [kg]
1228V255	662.94	19.05	28	0.20
1230V341	878.84	19.05	30	0.26
1230V348	896.62	19.05	30	0.26
1330V242	627.38	20.64	30	0.25
1422V235	609.60	22.23	22	0.20
1422V240	627.38	22.23	22	0.20
1422V270	703.58	22.23	22	0.22
1422V290	751.84	22.23	22	0.23
1422V300	779.78	22.23	22	0.24
1422V330	855.98	22.23	22	0.26
1422V340	878.84	22.23	22	0.26
1422V360	932.18	22.23	22	0.27
1422V400	1036.32	22.23	22	0.30
1422V420	1087.12	22.23	22	0.31
1422V440	1130.30	22.23	22	0.32
1422V460	1181.10	22.23	22	0.33
1422V466	1193.80	22.23	22	0.33
1422V470	1206.50	22.23	22	0.34
1422V480	1236.98	22.23	22	0.34
1422V540	1391.92	22.23	22	0.37
1422V600	1541.78	22.23	22	0.41
1422V660	1694.18	22.23	22	0.44
1422V780	1998.98	22.23	22	0.51
1426V299	774.70	22.23	26	0.30
1426V328	845.82	22.23	26	0.32

Belt Ref. [RMA]	Outside Length [mm]	Top Width [mm]	Angle (°)	Weight [kg]
1426V362	932.18	22.23	26	0.34
1430V215	553.72	22.23	30	0.20
1430V315	812.80	22.23	30	0.27
1430V375	965.20	22.23	30	0.32
1430V450	1158.24	22.23	30	0.37
1430V500	1282.70	22.23	30	0.40
1524V301	777.24	23.81	24	0.27
1526V264	685.80	23.81	26	0.25
1526V294	762.00	23.81	26	0.27
1528V298	769.62	23.81	28	0.27
1528V326	840.74	23.81	28	0.29
1528V360	927.10	23.81	28	0.32
1528V414	1064.26	23.81	28	0.36
1622V270	698.50	25.40	22	0.27
1622V297	767.08	25.40	22	0.28
1622V307	789.94	25.40	22	0.29
1622V520	1333.50	25.40	22	0.37
1626V262	678.18	25.40	26	0.27
1626V290	756.92	25.40	26	0.30
1626V304	789.94	25.40	26	0.32
1626V330	858.52	25.40	26	0.34
1626V339	881.38	25.40	26	0.34
1626V380	977.90	25.40	26	0.38
1626V384	995.68	25.40	26	0.39
1626V395	1023.62	25.40	26	0.39

MULTI-SPEED

Belt Ref. (RMA)	Outside Length (mm)	Top Width (mm)	Angle (°)	Weight (kg)
1626V411	1064.26	25.40	26	0.41
1626V428	1099.82	25.40	26	0.42
1626V440	1135.38	25.40	26	0.44
1626V455	1173.48	25.40	26	0.45
1626V513	1315.72	25.40	26	0.50
1626V517	1323.34	25.40	26	0.51
1626V597	1539.24	25.40	26	0.58
1626V604	1554.48	25.40	26	0.59
1626V658	1694.18	25.40	26	0.64
1628V210	538.48	25.40	28	0.20
1628V315	830.58	25.40	28	0.34
1632V210	556.26	25.40	32	0.21
1822V290	749.30	28.58	22	0.30
1822V328	850.90	28.58	22	0.35
1826V250	645.16	28.58	26	0.25
1828V368	955.04	28.58	28	0.41
1832V338	873.76	28.58	32	0.36
1922V256	670.56	30.16	22	0.30
1922V277	716.28	30.16	22	0.32
1922V282	736.60	30.16	22	0.33
1922V298	777.24	30.16	22	0.35
1922V302	782.32	30.16	22	0.35
1922V321	838.20	30.16	22	0.38
1922V332	863.60	30.16	22	0.39
1922V338	881.38	30.16	22	0.39
1922V363	942.34	30.16	22	0.42
1922V381	985.52	30.16	22	0.43
1922V386	998.22	30.16	22	0.44
1922V403	1051.56	30.16	22	0.45
1922V417	1079.50	30.16	22	0.48
1922V426	1102.36	30.16	22	0.49
1922V443	1145.54	30.16	22	0.50
1922V454	1173.48	30.16	22	0.51
1922V460	1188.72	30.16	22	0.52
1922V484	1249.68	30.16	22	0.55
1922V526	1353.82	30.16	22	0.58
1922V544	1399.54	30.16	22	0.61
1922V604	1554.48	30.16	22	0.68
1922V630	1615.44	30.16	22	0.70
1922V646	1661.16	30.16	22	0.71
1922V666	1711.96	30.16	22	0.73
1922V686	1760.22	30.16	22	0.75
1922V706	1811.02	30.16	22	0.77
1922V756	1940.56	30.16	22	0.84
1922V806	2065.02	30.16	22	0.87
1922V846	2169.16	30.16	22	0.92
1922V1146	2931.16	30.16	22	1.25
1926V249	642.62	30.16	26	0.31
1926V250	652.78	30.16	26	0.31
1926V275	713.74	30.16	26	0.33
1926V333	861.06	30.16	26	0.38
1926V367	944.88	30.16	26	0.42

Belt Ref. (RMA)	Outside Length (mm)	Top Width (mm)	Angle (°)	Weight (kg)
1926V376	985.52	30.16	26	0.43
1926V380	988.06	30.16	26	0.43
1926V390	1005.84	30.16	26	0.44
1926V407	1051.56	30.16	26	0.45
1926V415	1069.34	30.16	26	0.46
1926V427	1023.62	30.16	26	0.47
1926V507	1305.56	30.16	26	0.55
1926V542	1407.16	30.16	26	0.58
1930V355	916.94	30.16	30	0.41
1930V366	944.88	30.16	30	0.42
1930V375	967.74	30.16	30	0.43
1930V400	1033.78	30.16	30	0.45
1930V425	1094.74	30.16	30	0.47
1930V431	1117.60	30.16	30	0.48
1930V450	1158.24	30.16	30	0.49
1930V475	1221.74	30.16	30	0.51
1930V485	1247.14	30.16	30	0.52
1930V491	1270.00	30.16	30	0.53
1930V500	1285.24	30.16	30	0.53
1930V530	1361.44	30.16	30	0.55
1930V541	1397.00	30.16	30	0.57
1930V560	1445.26	30.16	30	0.58
1930V585	1501.14	30.16	30	0.60
1930V600	1539.24	30.16	30	0.61
1930V630	1615.44	30.16	30	0.64
1930V641	1640.84	30.16	30	0.66
1930V691	1767.84	30.16	30	0.70
1930V800	2047.24	30.16	30	0.78
1930V891	2275.84	30.16	30	0.85
2026V422	1092.20	31.75	26	0.45
2026V445	1148.08	31.75	26	0.46
2026V474	1224.28	31.75	26	0.48
2026V607	1562.10	31.75	26	0.57
2030V381	977.90	31.75	30	0.43
2126V297	772.16	33.34	26	0.38
2126V307	797.56	33.34	26	0.39
2126V309	805.18	33.34	26	0.39
2126V365	949.96	33.34	26	0.45
2126V377	975.36	33.34	26	0.46
2126V468	1211.58	33.34	26	0.57
2130V374	965.20	33.34	30	0.46
2226V307	792.48	34.93	26	0.39
2230V266	698.50	34.93	30	0.34
2230V273	708.66	34.93	30	0.35
2230V275	713.74	34.93	30	0.35
2230V326	850.90	34.93	30	0.42
2230V375	970.28	34.93	30	0.49
2322V329	848.36	36.51	22	0.48
2322V347	894.08	36.51	22	0.49
2322V364	944.88	36.51	22	0.50
2322V396	1031.24	36.51	22	0.55
2322V421	1089.66	36.51	22	0.58

MULTI-SPEED

Belt Ref. (RMA)	Outside Length (mm)	Top Width (mm)	Angle (°)	Weight (kg)
2322V434	1122.68	36.51	22	0.59
2322V441	1145.54	36.51	22	0.61
2322V461	1193.80	36.51	22	0.64
2322V481	1249.68	36.51	22	0.66
2322V521	1341.12	36.51	22	0.70
2322V541	1399.54	36.51	22	0.73
2322V601	1554.48	36.51	22	0.80
2322V621	1600.20	36.51	22	0.84
2322V661	1711.96	36.51	22	0.88
2322V681	1747.52	36.51	22	0.91
2322V701	1813.56	36.51	22	0.94
2322V721	1864.36	36.51	22	0.96
2322V801	2067.56	36.51	22	1.07
2326V310	807.72	36.51	26	0.42
2326V359	929.64	36.51	26	0.50
2330V273	708.66	36.51	30	0.36
2330V338	878.84	36.51	30	0.44
2330V359	927.10	36.51	30	0.48
2332V373	965.20	36.51	32	0.50
2422V570	1465.58	38.10	22	0.84
2426V343	899.16	38.10	26	0.52
2430V297	779.78	38.10	30	0.47
2430V302	784.86	38.10	30	0.48
2430V319	828.04	38.10	30	0.50
2430V345	894.08	38.10	30	0.53
2430V379	980.44	38.10	30	0.58
2436V331	863.60	38.10	36	0.51
2526V302	779.78	39.69	26	0.98
2526V314	822.96	39.69	26	1.00
2528V370	957.58	39.69	28	1.09
2530V300	787.40	39.69	30	0.98
2530V335	868.68	39.69	30	1.02
2530V470	1211.58	39.69	30	1.23
2530V490	1270.00	39.69	30	1.25
2530V500	1292.86	39.69	30	1.27
2530V530	1371.60	39.69	30	1.30
2530V550	1422.40	39.69	30	1.34
2530V560	1440.18	39.69	30	1.36
2530V575	1485.90	39.69	30	1.39
2530V595	1541.78	39.69	30	1.41
2530V600	1541.78	39.69	30	1.42
2530V610	1574.80	39.69	30	1.43
2530V618	1587.50	39.69	30	1.45
2530V630	1630.68	39.69	30	1.48
2530V660	1701.80	39.69	30	1.50
2530V670	1732.28	39.69	30	1.52
2530V680	1744.98	39.69	30	1.55
2530V690	1778.00	39.69	30	1.57
2530V700	1803.40	39.69	30	1.58
2530V730	1884.68	39.69	30	1.59
2530V740	1905.00	39.69	30	1.61
2530V750	1935.48	39.69	30	1.64

Belt Ref. (RMA)	Outside Length (mm)	Top Width (mm)	Angle (°)	Weight (kg)
2530V790	2032.00	39.69	30	1.70
2530V840	2159.00	39.69	30	1.77
2530V890	2286.00	39.69	30	1.86
2530V934	2397.76	39.69	30	1.91
2530V990	2540.00	39.69	30	2.00
2530V1090	2794.00	39.69	30	2.14
2530V1190	3040.38	39.69	30	2.30
2530V1290	3302.00	39.69	30	2.43
2530V1490	3810.00	39.69	30	2.73
2530V1690	4312.92	39.69	30	3.02
2626V369	949.96	41.28	26	0.64
2626V388	1008.38	41.28	26	0.73
2630V345	896.62	41.28	30	0.52
2630V395	1021.08	41.28	30	0.76
2636V332	863.60	41.28	36	0.45
2822V778	2019.30	44.45	22	1.36
2826V412	1064.26	44.45	26	0.70
2826V452	1168.40	44.45	26	0.77
2830V337	883.92	44.45	30	0.56
2830V363	934.72	44.45	30	0.61
2830V366	944.88	44.45	30	0.60
2830V367	962.66	44.45	30	0.62
2830V393	1013.46	44.45	30	0.66
2830V396	1023.62	44.45	30	0.67
2830V422	1084.58	44.45	30	0.71
2830V428	1107.44	44.45	30	0.73
2830V492	1272.54	44.45	30	0.84
2836V343	891.54	44.45	36	0.58
2836V350	909.32	44.45	36	0.59
2836V380	985.52	44.45	36	0.64
2926V366	952.50	46.04	26	0.92
2926V400	1036.32	46.04	26	1.00
2926V426	1104.90	46.04	26	1.05
2926V471	1219.20	46.04	26	1.11
2926V477	1231.90	46.04	26	1.14
2926V486	1249.68	46.04	26	1.16
2926V491	1270.00	46.04	26	1.16
2926V521	1346.20	46.04	26	1.23
2926V534	1376.68	46.04	26	1.25
2926V546	1409.70	46.04	26	1.27
2926V574	1480.82	46.04	26	1.32
2926V586	1511.30	46.04	26	1.34
2926V606	1562.10	46.04	26	1.39
2926V616	1607.82	46.04	26	1.41
2926V636	1635.76	46.04	26	1.45
2926V646	1663.70	46.04	26	1.45
2926V666	1714.50	46.04	26	1.51
2926V686	1765.30	46.04	26	1.55
2926V706	1816.10	46.04	26	1.59
2926V726	1866.90	46.04	26	1.61
2926V776	1993.90	46.04	26	1.70
2926V786	2016.76	46.04	26	1.75

MULTI-SPEED

Belt Ref. (RMA)	Outside Length (mm)	Top Width (mm)	Angle (°)	Weight (kg)
2926V834	2138.68	46.04	26	1.84
2926V856	2194.56	46.04	26	1.86
2926V891	2286.00	46.04	26	1.95
2926V906	2324.10	46.04	26	1.98
2926V966	2476.50	46.04	26	2.09
2926V1006	2578.10	46.04	26	2.16
2926V1026	2631.44	46.04	26	2.20
2926V1086	2783.84	46.04	26	2.32
2930V348	901.70	46.04	26	0.89
2930V492	1270.00	46.04	26	1.16
3028V386	1000.76	47.63	28	0.78
3030V357	927.10	47.63	30	0.71
3030V377	982.98	47.63	30	0.76
3030V387	1005.84	47.63	30	0.78
3036V351	914.40	47.63	36	0.70
3226V392	1010.92	50.80	26	0.93
3226V400	1043.94	50.80	26	0.95
3226V433	1120.14	50.80	26	1.00
3226V439	1135.38	50.80	26	1.02
3226V450	1163.32	50.80	26	1.05
3226V465	1203.96	50.80	26	1.07
3226V505	1305.56	50.80	26	1.16
3226V514	1328.42	50.80	26	1.18
3226V545	1404.62	50.80	26	1.25
3226V585	1508.76	50.80	26	1.32
3226V603	1559.56	50.80	26	1.36
3226V650	1673.86	50.80	26	1.45
3226V663	1711.96	50.80	26	1.48
3226V723	1864.36	50.80	26	1.61
3226V783	2019.30	50.80	26	1.73
3226V843	2169.16	50.80	26	1.86
3226V903	2321.56	50.80	26	1.98
3226V963	2473.96	50.80	26	2.09
3226V1023	2626.36	50.80	26	2.23
3226V1083	2778.76	50.80	26	2.36
3230V419	1084.58	50.80	30	0.91
3230V481	1242.06	50.80	30	1.05
3230V560	1442.72	50.80	30	1.23
3230V630	1620.52	50.80	30	1.41
3230V670	1722.12	50.80	30	1.50
3230V850	2179.32	50.80	30	1.91
3230HV856	2202.18	50.80	30	2.93
3230HV931	2392.68	50.80	30	2.68
3236V369	957.58	50.80	36	0.82
3236V389	1008.38	50.80	36	0.89
3236V432	1122.68	50.80	36	1.07
3236HV528	1366.52	50.80	36	1.55
3236HV553	1430.02	50.80	36	1.64
3236HV570	1473.20	50.80	36	1.68
3236HV585	1511.30	50.80	36	1.75
3236HV603	1557.02	50.80	36	1.80
3236HV613	1579.88	50.80	36	1.82

Belt Ref. (RMA)	Outside Length (mm)	Top Width (mm)	Angle (°)	Weight (kg)
3236HV620	1600.20	50.80	36	1.86
3236HV626	1615.44	50.80	36	1.86
3236HV644	1661.16	50.80	36	1.94
3236HV670	1727.20	50.80	36	2.02
3236HV702	1805.94	50.80	36	2.14
3236HV723	1859.28	50.80	36	2.20
3236HV821	2110.74	50.80	36	2.55
3326V478	1231.90	52.39	26	1.09
3428V451	1168.40	53.98	28	1.14
3430V424	1099.82	53.98	30	1.07
3430V476	1239.52	53.98	30	1.20
3430V493	1272.54	53.98	30	1.25
3432V450	1163.32	53.98	32	1.15
3432V456	1181.10	53.98	32	1.16
3432V480	1239.52	53.98	32	1.21
3432V484	1252.22	53.98	32	1.23
3432V528	1356.36	53.98	32	1.33
3432V534	1379.22	53.98	32	1.35
3436V404	1049.02	53.98	36	1.03
3630V455	1178.56	57.15	30	1.25
3636V479	1239.52	57.15	36	1.50
3726V558	1445.26	58.74	26	2.00
3826V459	1188.72	60.33	26	1.68
3826V465	1206.50	60.33	26	1.70
3830V501	1295.40	60.33	30	1.73
3830V510	1320.80	60.33	30	1.74
3830V517	1338.58	60.33	30	1.75
3830V580	1498.60	60.33	30	1.82
3830V587	1513.84	60.33	30	1.83
3836V418	1084.58	60.33	36	1.63
3836V426	1107.44	60.33	36	1.64
3836V654	1684.02	60.33	36	1.90
4030V538	1384.30	63.50	30	1.73
4030V590	1524.00	63.50	30	1.89
4036V541	1407.16	63.50	36	1.74
4036V574	1480.82	63.50	36	1.83
4230V503	1305.56	66.68	30	1.98
4230V556	1442.72	66.68	30	2.02
4230V605	1549.40	66.68	30	2.09
4234V998	2562.86	66.68	34	2.50
4330V521	1351.28	68.26	30	2.11
4430V510	1320.80	69.85	30	1.91
4430V530	1371.60	69.85	30	1.95
4430V548	1397.00	69.85	30	2.05
4430V555	1435.10	69.85	30	2.05
4430V560	1447.80	69.85	30	2.10
4430V570	1473.20	69.85	30	2.14
4430V578	1498.60	69.85	30	2.18
4430V600	1549.40	69.85	30	2.26
4430V610	1574.80	69.85	30	2.30
4430V630	1625.60	69.85	30	2.36
4430V652	1681.48	69.85	30	2.50

MULTI-SPEED

Belt Ref. (RMA)	Outside Length (mm)	Top Width (mm)	Angle (°)	Weight (kg)
4430V660	1701.80	69.85	30	2.50
4430V670	1727.20	69.85	30	2.57
4430V690	1778.00	69.85	30	2.64
4430V700	1803.40	69.85	30	2.64
4430V730	1879.60	69.85	30	2.82
4430V740	1905.00	69.85	30	2.86
4430V760	1955.80	69.85	30	2.91
4430V772	1996.44	69.85	30	3.00
4430V780	2006.60	69.85	30	3.00
4430V790	2032.00	69.85	30	3.09
4430V850	2184.40	69.85	30	3.36
4430V910	2336.80	69.85	30	3.55
4430V970	2489.20	69.85	30	3.82
4430V1000	2567.94	69.85	30	3.86
4430V1030	2641.60	69.85	30	4.05
4430V1090	2794.00	69.85	30	4.27
4430V1150	2946.40	69.85	30	4.50
4430V1250	3202.94	69.85	30	4.91
4430V1320	3378.20	69.85	30	5.18
4430V1410	3606.80	69.85	30	5.55
4430V1460	3733.80	69.85	30	5.73
4430V1610	4114.80	69.85	30	6.36
4430V1810	4622.80	69.85	30	7.23
4430V1917	4894.58	69.85	30	7.64
4436V525	1358.90	69.85	36	2.14
4436V551	1424.94	69.85	36	2.27
4436V555	1435.10	69.85	36	2.29
4436V561	1450.34	69.85	36	2.34
4436V576	1488.44	69.85	36	2.41
4436V581	1501.14	69.85	36	2.42
4436V646	1663.70	69.85	36	2.75
4436V714	1846.58	69.85	36	3.09
4626V596	1539.24	73.03	26	3.23
4630V650	1678.94	73.03	30	3.34
4630V663	1709.42	73.03	30	3.36
4630V668	1729.74	73.03	30	3.39
4630V683	1760.22	73.03	30	3.41
4630V733	1887.22	73.03	30	3.52
4630V1070	2745.74	73.03	30	4.23
4632V722	1866.90	73.03	32	3.50
4636V613	1579.88	73.03	36	3.27
4830V602	1551.94	76.20	30	2.73
4830V614	1587.50	76.20	30	2.75
4830V653	1686.56	76.20	30	2.91
4830V692	1785.62	76.20	30	3.07
4830V699	1803.40	76.20	30	3.07
4830V730	1882.14	76.20	30	3.23
4830V750	1930.40	76.20	30	3.27
4830V850	2186.94	76.20	30	3.64
4830V970	2491.74	76.20	30	4.09
4830V1070	2745.74	76.20	30	4.43
4836V588	1518.92	76.20	36	2.73

Belt Ref. (RMA)	Outside Length (mm)	Top Width (mm)	Angle (°)	Weight (kg)
4836V608	1572.26	76.20	36	2.82
4836V618	1610.36	76.20	36	2.91
4836V642	1658.62	76.20	36	3.00
4836V655	1691.64	76.20	36	3.09
4836V729	1879.60	76.20	36	3.45
4836V789	2032.00	76.20	36	3.82
4836V850	2186.94	76.20	36	4.14
4836V1180	3030.22	76.20	36	5.91
5126V938	2413.00	80.96	26	5.30
5130V732	1894.84	80.96	30	4.27
5228V930	2397.76	82.55	28	4.77
5228V930S*	2397.76	82.55	28	9.55
5230V662	1709.42	82.55	30	3.45
5230V734	1912.62	82.55	30	3.86
5230V734S*	1912.62	82.55	30	7.64
5230V867	2242.82	82.55	30	4.52
5230V867S*	2242.82	82.55	30	9.09
5636V750	1940.56	88.90	36	5.63
5636V774	1998.98	88.90	36	4.98
5830V756	1953.26	92.08	30	5.91
5836V737	1905.00	92.08	36	5.91
6036V761	1973.58	95.25	36	4.70
6036V850	2192.02	95.25	36	5.14
6236V694	1798.32	98.43	36	4.18
6236V725	1877.06	98.43	36	4.45
6236V762	1971.04	98.43	36	4.91
6236V905	2334.26	98.43	36	6.54

*Set of 2